

DISCHARGE FLUID BURST-FREE AND REGULATE FLOW PATH LEAK-FREE!

www.hicHydraulic.com

HIC UNIVERSAL



100% **Physical Checks** with Respect
to Dimensions

100% **Chemical Checks** w.r.t. MOC

20% **Random Physical Tests**



Cost-effective Hydraulic High Pressure Fittings Produced:

Kink-less Armored Slurry Suction, Steam Delivery, Water Blast Hydraulic High Pressure Rubber & SS Braided Hoses



Mud Water Suction as per IS 3549, Chemical per IS 7654, Slurry per EN 287, Petroleum per IS 10733, Bulker Fly Ash Hose per IS 8189
(10/15/18bar Pressure, 3:1 Safety, Armored, 50~457 mm bore ID)



Delivery Hose Steam as per IS 10655, Water per IS 444, Air per IS 446, Gas Welding per IS 447
(5/7/10/14/16/20bar Pressure, 4:1 Safety, Braided/Textile Ply, 8~100 mm bore ID)



Petroleum Transfer Hydraulic Spiral Hose per SAE 100
(35~703bar Pressure, 4:1 Safety, HTS Wire Braid, 6~100 mm bore ID)



Layflat Rubber Water Discharge Hose as per ISO 4641
(10/15bar Pressure, 3:1 Safety, Spiraled Ply, 40~203 mm bore ID)



Canvas Rubber Lined Fire Hose as per IS 636, Reel per IS 884
(10/12/14/16/18bar Pressure, 3.2:1 Safety, Single Jacket EPDM, Galvanized Steel/ SS 304, Gunmetal/ SS Nozzle, 25~152 mm bore ID)



Non Conductive Furnace Hose as per ISO 8330
(10/15bar Pressure, 4:1 Safety, Fire-proof~1000°C/ Asbestos~460°C, 12.5~150 mm bore ID)



Water Blast High Pressure Jetting Hose per ISO 7751, Concrete Pump per EN 12001
(1000/85/100bar Pressure, 2.5:1/2:1 Safety, Spiral Wire/ Tire cord Ply, 12.5/19/63~125 mm bore ID)



Acid, High Temperature SS Corrugated Flexibe Hose per BS 6501, ISO 10380
(5~275bar Pressure, SS 304/316/321, 1/2/3 wire Braid, MS/SS304 Threaded or Flanged Fitting, 10~400 mm bore ID)

Positive Thru-Flow Coupler, Adaptor High Pressure Hydraulic Pneumatic Stainless Steel Camlock & QRC



Camlock Fittings Hose Coupling as per MIL-C-27487, EN 14420
(17~35bar Pressure, SS 304/316/CS, Adaptor(F) part:A/Coupler(M):B/Hose Shank Coupler:C/Coupler(F):D/Adaptor:E/Adaptor (M):F/DC/DP, 1/2~6 inch Size)



Air and Water Push Pull Fast Coupling per ISO 7241
(10~350bar Pressure, SS 304/316/CS/Brass, Double check valve/Single valve/Through type/NRV, Nitrile/Silicone/Viton Seal, Coupler/Adapter/ Complete set, 1/8~3 inch Size)

Shut-Off 2/3Way Ball/ Needle/ Gate/ Butterfly types Chemical, Gas Directional Control Valves



Water Shut-Off High Pressure Ball Valve per IS 9884, API 598
(2/3/4Way/3pc, Screwed/Flanged, Directional L/T/Full bore/Reduced Port, SS/CS/Forged steel Body, Pressure 50~1000bar, PTFE/GFT/ CFT/POM/PEEK Seal, 1/4~6 inch Size)



Gas and Fluid Flow Control Needle Valve per ISO 10423
(Screwed/Flanged, Straight/Angular Port, SS/CS/Brass Body, Pressure 20~500bar, PTFE/NBR/FPM/Grafoil Seal, 1/8~2 inch Size)



Beverages Flow Control Wafer type and Welded type Butterfly Valve per ISO 5752
(Wafer/Flanged, SS/CS/Cast Iron Body, Pressure 20~500bar, Nitrile/EPDM/PTFE Seal, 2~16 inch Size)



Isolation Plumbing Acid and Alkaline Control Gate Valve per ISO 5996
(Screwed/Socket/Butt weldable, SS/CS/Forged steel Body, Pressure 300~1500class, PTFE/Grafoil Seal, 1/2~12 inch Size)

HIC UNIVERSAL

True Performance Rubbers

www.hicHydraulic.com

Technical **Specifications** download from:
www.hic-india.com


Credentials at:
www.rubber-steel-industrial-products.com

QAP at:
www.universaldelhi.org

ISO 9001 Certified Company Profile at:
www.hicrubber.com



Test Lab

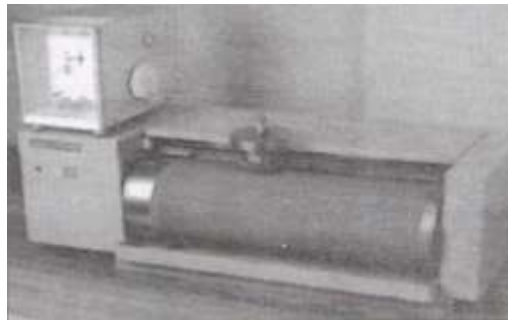

Abrasion Resistance Test



Water and Dust Penetration Test Apparatus

RFQ at:
belts@universaldelhi.org ; universal@hic-india.com ; export@hicrubber.com



Export Award Honoured in Feb 1997

WISH YOU
HIGH PRESSURE
FLUID & AIR **FLOW!**

HIC
UNIVERSAL

True Performance Rubbers

High Pressure Hydraulic Pneumatic Hose, Quick Camlock, Valve

Manguera neumática hidráulica de alta presión, acoplamiento rápido, válvula

ارتفاع ضغط خرطوم هوائي هيدروليكي ، اقتران سريع ، صمام

Tuyau pneumatique hydraulique haute pression, raccord rapide, vannes



Hydraulic Fluid Fitting Installation at:
www.hichydraulic.com

Test Certificate & 1 Year Warranty Info at:
www.hic-india.com

Product Specifications Inquiry Request Form RFQ at:
www.universaldelhi.org



T: +91 88266 79660, 72890 45000
E: export@hicrubber.com; delhi@hichydraulic.com

Handling Fluid Flow Control

Since 1988

**HIC
UNIVERSAL**
True Performance Rubbers