


Solid Belt-Splice use of Elevator Bolt, Conveyor **Belt Fastener**

Made in India



Hawk Plate
as per IS 10288

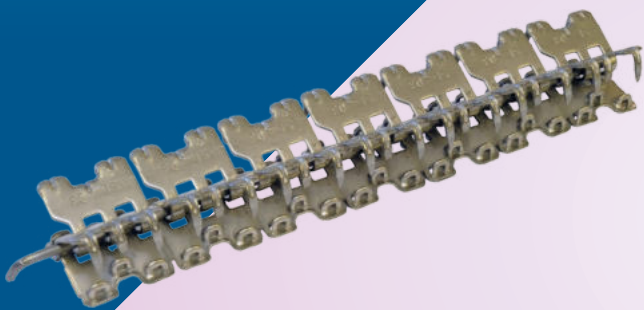

Euro Elevator
per DIN 15237 gr 4.6




Staple Food gr SS n GS
per ISO 14890



Fang Bolt
per ISO grade 5.8



Norway gr 2
Bolt Foodgrade



P14 Hook Lacing

**PERFORMANCE MEETS
STRONG MECHANICAL-JOINTS
FEATURES**

www.hicConveyors.com


T: +91 88266 79660, 72890 45000



**Installation & Warranty
Information**

HIC
UNIVERSAL
True Performance Rubbers

Wish Grip-well
Conveyor Belt
Joints And
Bucket Elevator
Belt-Splicing

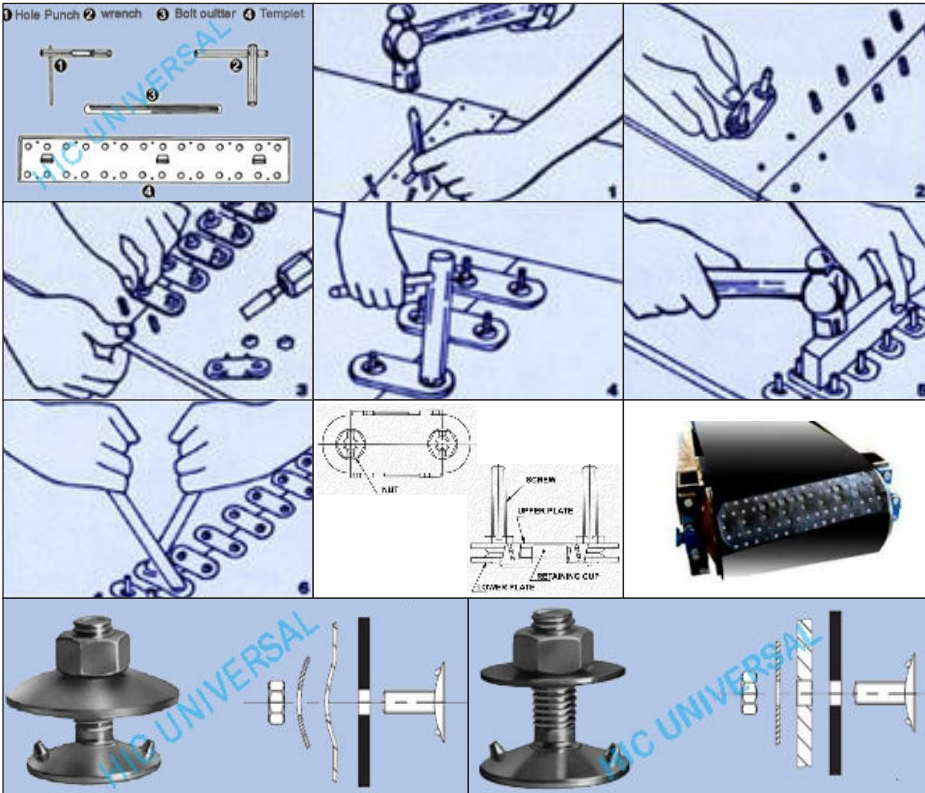

Manufacturing Range at: www.UniversalDelhi.org
Profile at: www.hicRubber.com



Thank You for Purchasing HIC “UNIVERSAL” Belt Fastener Bolt

HIC International Co.'s Manufactured Quality Solid Plate Type Conveyor Belt Fasteners and Elevator Euro Bolts produced from Tempered steel plates, pressed steel, Galvanized steel, Stainless steel SS304 food grade pre-inserted staples lacing Belt Fastener Conveyor Elevator superseding IS 10288, DIN 15237, ISO grade 5.8 quality standards Heavy Duty Superb Breaking Strength & Endless Belt Strong Mechanical Fasteners aspect Advantage assures Long Life Reliability.



Continuous Movement Elevator Conveyor Belt Fasteners Installation Tips

- Squared Ends of Belt be Placed Together** and nail the template into position, taking care that plugs on the template are inserted between the belt ends. Bend the nails outwards to prevent template rising from the belt-surface. Punch the holes, using the appropriate size of special HIC Universal straight sided belt punch.
- Push the Bolt Ends after Removing Template** through the punched holes ends and through punched holes from the underside of the belting.
- Top Plates be Placed in Position** and apply the slotted nuts loosely by hand. Ensure plates are positioned accurately.
- Run Down each Nut** evenly with a brace or hand wrench (also produced by HIC Universal).
- Hammer the Plates into the Belt Surface** using a metal block placed across the fasteners and between the nuts. Again then re-tighten, using the wrench until the top plate is fully bedded into the belt surface.
- Break-off the Protruding Ends of the Bolts** using pair bolt breakers (also manufactured by HIC Universal). Rivet over the ends of the bolts.

Steps for mechanical belt fasteners

Keep in hand following:



“HIC Universal” Conveyor Belt Fasteners



Power Punch



Hammer



Power Boring Bit



Bolt-Horn Assembly Tool



Power Wrench



Bolt Breaker



Quick Change Chuck (optional)

Disclaimer: Information's, written and verbal are provided by HIC, relative to its **mechanical belt fasteners** which it determines to be reliable & no liabilities of whatsoever nature in regards to its uses. The purchaser of HIC UNIVERSAL brand **conveyor belt fastener and elevator bolts** should determine for itself the suitability of such steel products.

Selection **Guide:** www.hic-india.com | Technical Data **Download:** www.hicconveyors.com | **Reach** HIC: export@hicrubber.com



Why HIC Universal

Conveyor Belt Fastener & Elevator Bolts?

High Tensile Strength Chamfered Steel Solid Plate Hawk

Ensures Superb Tension & Friendliness to Belt Scraper in Crushers

Minimizes Maintenance Time & Maximum Belt Conveyor Uptime

Apt for High Stretch Belts P.I.W. ratings in Underground Mines

Fast Buckets Jointing and Super-Grip Euro, Oval, Ref 70 Bolts

Top Recessed Bolt Holes for Elevator Conveyance of Grain, Mud

Food Safe SS 304 Material Lacing Hook Pre-inserted Staples

Aids Fixed Tension in Food Conveying Belt in Single Strip Design



- facebook.com/hicguptas
- twitter.com/Rubber_HIC
- instagram.com/hicinternationalcoinc
- youtube.com/channel/UC7DFI0-YFzL2F8sKxZ4M0PA
- in.linkedin.com/in/anil-gupta-0800a437
- in.pinterest.com/universaldelhi/

www.hic-india.com

WARRANTY CERTIFICATE

The goods tailor-made, supplied as per buyer's P.O. specifications is warranted against any manufacturing defects for 12 months from the date of Invoice, and assume liability of repairing free of cost in the event of any manufacturing defects.

HIC Int. shall be under no liability in respect of any defect in the goods arising from any drawing, design or specification supplied by the Client. Goods claimed to be in default must be returned to HIC's factory at client cost; cost for return transport prepaid.



HIC INTERNATIONAL CO INC

+91 88266 79660 | export@hicrubber.com

**Reliable Partner
For your
Conveyor
Belt-Splicing**